



VLN08-9MAS8

Single Channel 0.8A Motor Driver

Version 1.12

Sep. 9, 2014



VOICELAND reserves the right to change this document without prior notice. Information provided by VOICELAND is believed to be accurate and reliable. However, VOICELAND makes no warranty for any errors which may appear in this document. Contact VOICELAND to obtain the latest version of device specifications before placing your orders. No responsibility is assumed by VOICELAND for any infringement of patent or other rights of third parties which may result from its use. In addition, VOICELAND products are not authorized for use as critical components in life support devices/systems or aviation devices/systems, where a malfunction or failure of the product may reasonably be expected to result in significant injury to the user, without the express written approval of VOICELAND.

1. GENERAL DESCRIPTION

VLN08-9MAS8 is a single-chip bi-directional motor driver CMOS IC for low-voltage applications. It is designed by LSI high technology with a low-power and low-cost process. It has H bridge driver of built-in MOSFET power switch to provide Forward / Reverse / Brake / Stop function for motor driver applications.

2. FEATURES


- (1). Wide operating voltage: 1.8V ~ 9.0V.
- (2). H bridge driver of internal PMOS/NMOS power switches.
- (3). Support 4 operating mode: Forward / Backward / Brake / Stop.
- (4). Low standby current. (Typ.=0.1uA)
- (5). Over 800mA output current capability.
- (6). Built-in Thermal Shutdown (TSD) circuit.
- (7). CMOS input. Built-in input pull-low resistance and no current-limit resistance required.
- (8). High 5KV Human Body Mode (HBM) ESD protection.
- (9). SOP-8 and ESOP-8 package type are available.

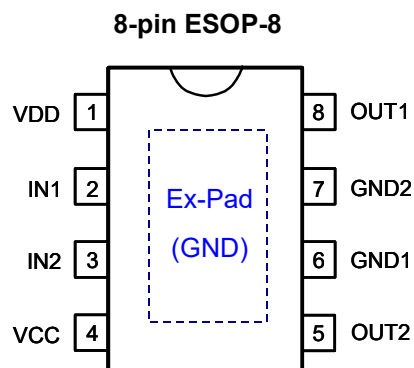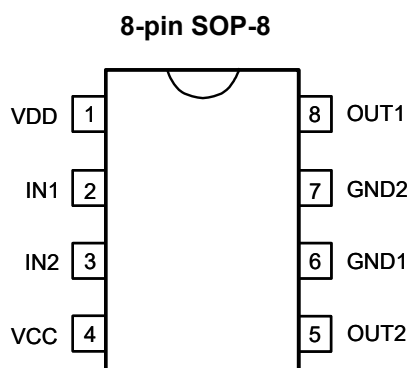

 : Exposed Pad.

Connect to PCB ground plane for heat dissipation.

3. BLOCK DIAGRAM

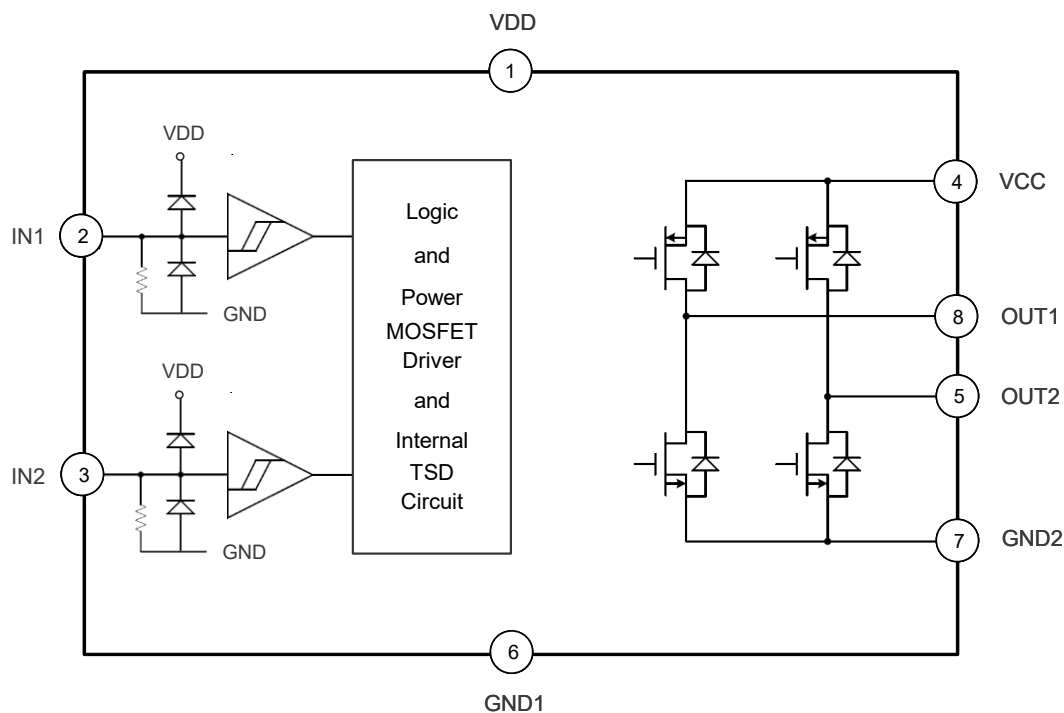

4. PIN DESCRIPTION

Pin Name	Pin No.	ATTR.	Description
IN1	2	I	Forward rotation logic input.
IN2	3	I	Backward rotation logic input.
OUT1	8	O	Forward rotation output.
OUT2	5	O	Backward rotation output.
VDD	1	Power	Positive power of logic control circuit.
VCC	4	Power	Positive power of output power MOSFET.
GND1	6	Power	Negative power of logic control circuit.
GND2	7	Power	Negative power of output power MOSFET.
Ex-Pad	9	Power	Exposed pad for thermal tab, must be connected to GND.

5. FUNCTION DESCRIPTION

<i>IN1</i>	<i>IN2</i>	<i>OUT1</i>	<i>OUT2</i>	<i>Function</i>
0	0	Z (Off)	Z (Off)	Stop (Standby)
1	0	1	0	Forward
0	1	0	1	Backward
1	1	0	0	Brake

6. ELECTRICAL CHARACTERISTICS

6.1 Absolute Maximum Rating


Symbol	Parameter		Rating	Unit
$V_{DD} - V_{SS}$	Supply voltage of logic control circuit		-0.5 ~ +7.5	V
V_{CC}	Supply voltage of output power MOSFET		9.6	V
$I_{OUT-PEAK}$	Output peak current		2.0	A
θ_{JA}	Thermal resistance (Junction to Ambient)	SOP-8	150	°C/W
		ESOP-8	60	
P_D	Power dissipation	SOP-8	0.9	W
		ESOP-8	2.3	
T_A	Operating ambient temperature		-40 ~ +85	°C
T_J	Operating junction temperature		+160	°C
T_{ST}	Storage temperature		-55 ~ +160	°C

6.2 DC Characteristics ($V_{DD}=3.0V$, $V_{CC}=6.0V$, $T_A=25^\circ C$, unless otherwise specified)


Symbol	Parameter		Min.	Typ.	Max.	Unit	Condition
V_{DD}	Operating voltage (Logic)		1.8		6.8	V	
V_{CC}	Operating voltage (MOSFET)		1.8		9.0	V	
I_{SB}	Standby current			0.1	1	uA	IN1=IN2=0
I_{OP}	Operating current	$V_{DD} = V_{CC} = 3.0V$		200		uA	IN1=1, IN2=0 or IN1=0, IN2=1 or IN1=1, IN2=1
		$V_{DD} = V_{CC} = 6.0V$		270		uA	
I_{IH}	Input high current (12kΩ pull-low resistance)			260		uA	$V_{IH} = 3.0V$
				510		uA	$V_{IH} = 6.0V$
V_{IH}	Input high voltage		$0.7V_{DD}$			V	
V_{IL}	Input low voltage				$0.3V_{DD}$	V	
R_{ON}	Output resistance (SOP-8 Package)			0.75		Ω	$I_{OUT} = 500mA$
				0.85		Ω	$I_{OUT} = 800mA$
				0.98		Ω	$I_{OUT} = 1100mA$
	Output resistance (ESOP-8 Package)			0.60		Ω	$I_{OUT} = 500mA$
				0.65		Ω	$I_{OUT} = 800mA$
				0.75		Ω	$I_{OUT} = 1100mA$
I_{OUT}	Output continuous current (* with PCB heat dissipation)			800	1100*	mA	SOP-8
				1000	1600*	mA	ESOP-8
I_{PULSE}	Pulsed drain current				5.0	A	Pulse width < 20ms
T_{RISE}	Output rise time			300		ns	PWM=20kHz, Duty=50%
T_{FALL}	Output fall time			120		ns	
T_{RP}	Input-to-Output response time			250		ns	
T_{TSD}	Thermal shutdown (TSD)			160		°C	Junction temperature
T_{TSDH}	Thermal shutdown hysteresis			35		°C	

7. APPLICATION CIRCUIT


(1) One Motor Bi-Directional Control (Single Power)

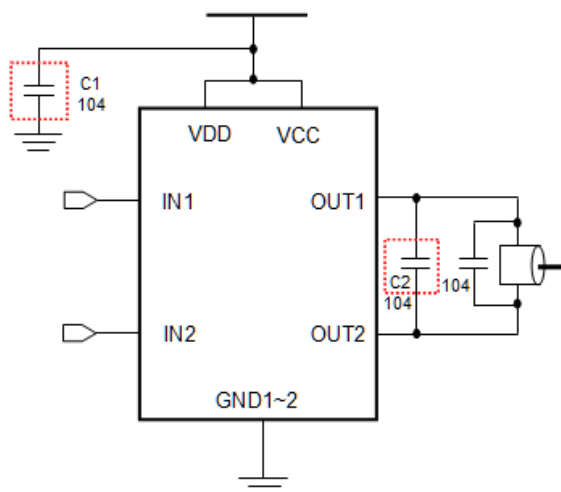


(2) Two Motors Directional Control (Single Power)

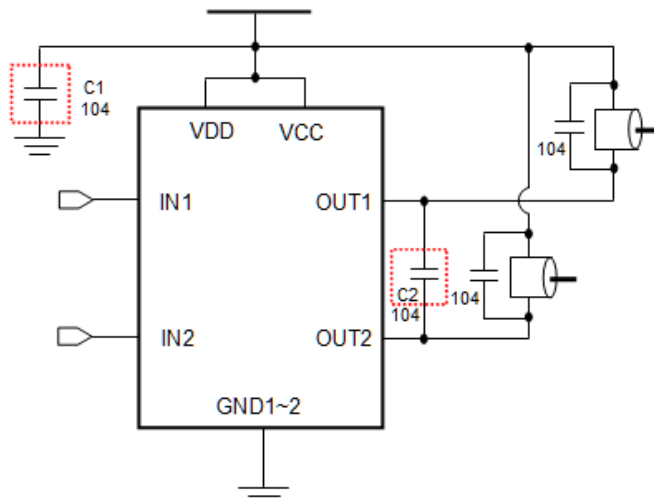

(3) One Motor Bi-Directional Control (Dual Power)

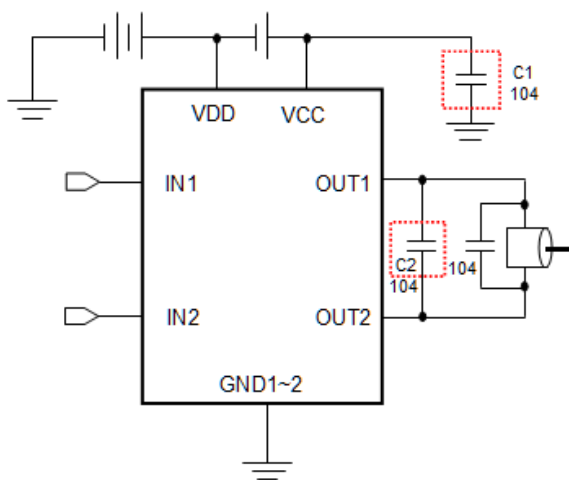

(4) Two Motors Directional Control (Dual Power)

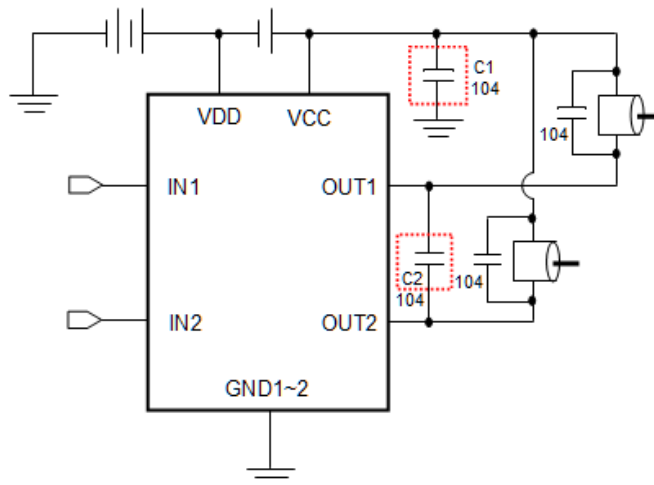


* In normal application, C1 (0.1uF) can be saved, but please reserve C1 space at PCB layout.


* If voltage is higher than 6.0V, C2 (0.1uF) is necessary to endure high voltage.

8. PACKAGE DIMENSION

8.1 8-Pin Plastic SOP (150 mil)

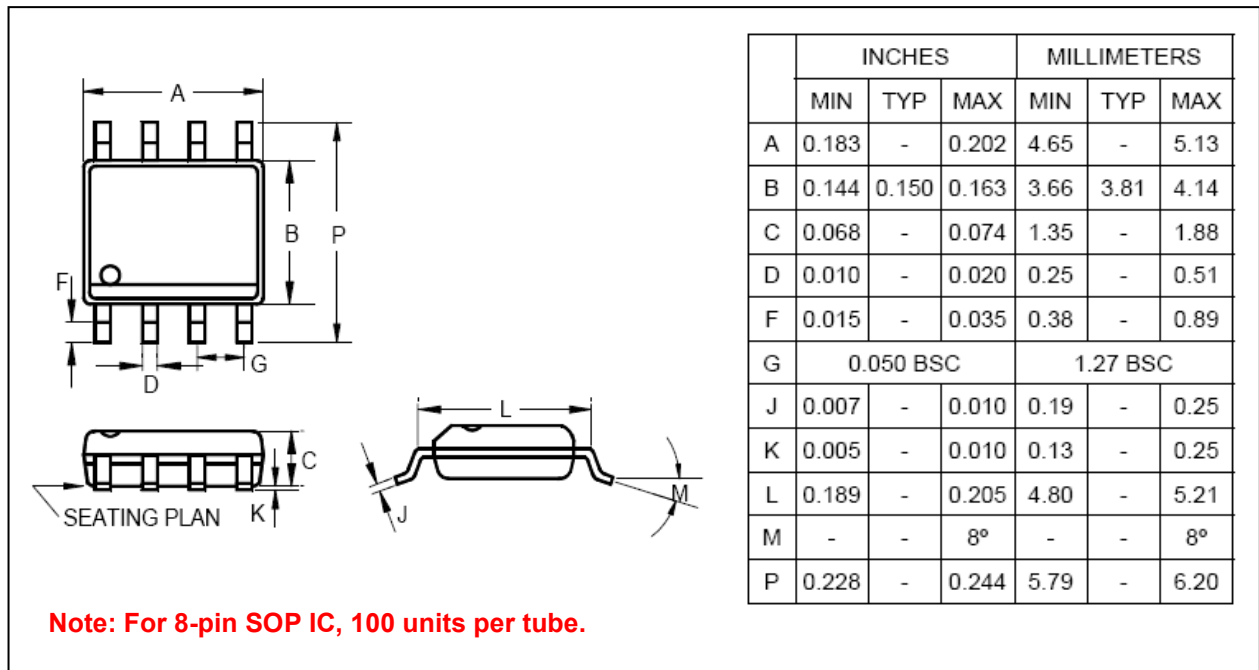

8.2 8-Pin Plastic ESOP with Exposed Pad (150 mil)

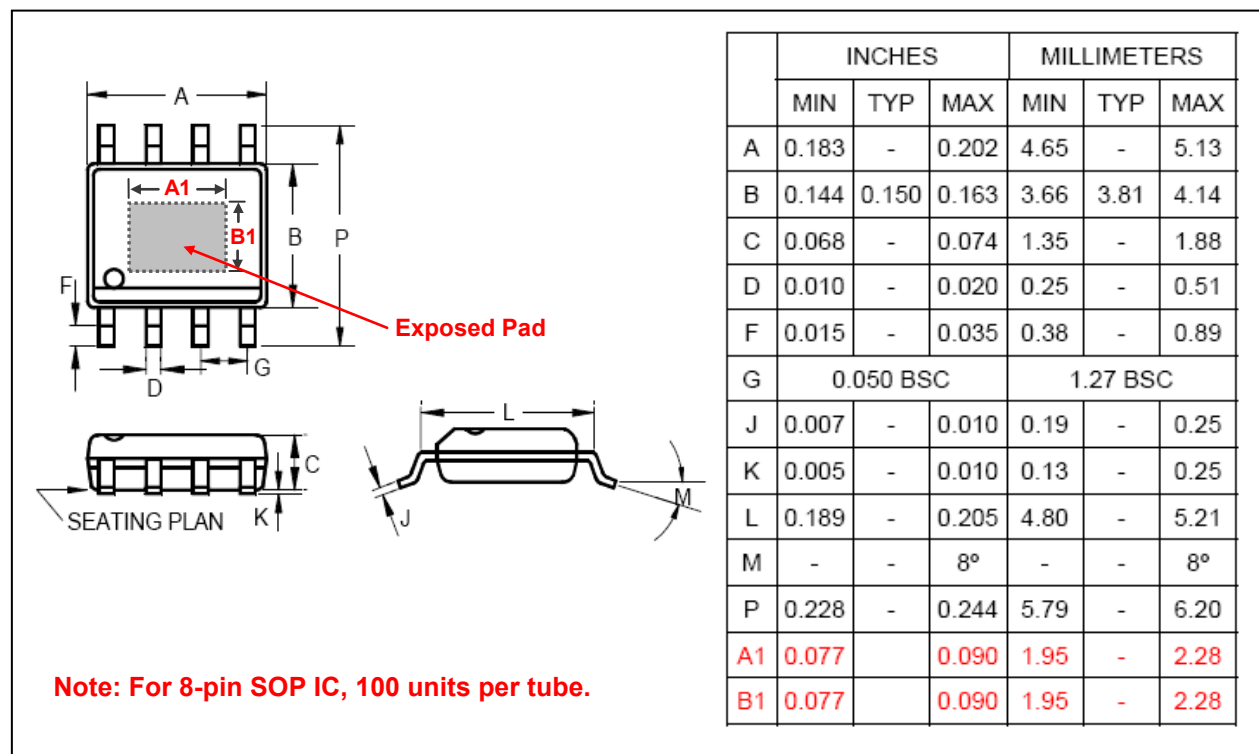

9. ORDERING INFORMATION

<i>P/N</i>	<i>Package Type</i>	<i>Package Width</i>	<i>Shipping</i>
VLN08-9MAS8	SOP-8	150 mil.	<u>Tube</u> : 100 pcs per Tube